


ACOUSTIC HANGER

Series: F/RAPID/FM-60

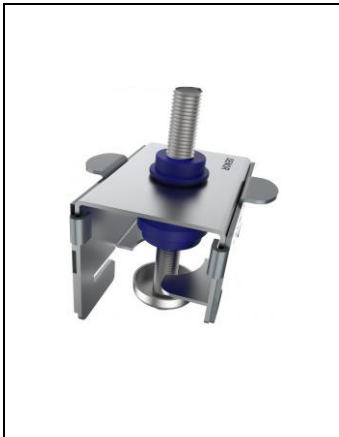

- Can turn into connector by removing polymer body.
- Tested to acoustic standard ISO 10846-1\*.
- Locking configuration holds structure in place in event of fire.
- It can be slide along the metal channel to exact fixing point.
- The 1.5mm thickness provides more security than regular connectors.
- Optimal load: 3kg to 45kg per mount.
- Suited for acoustic ceilings with 60mm profile such as TC60, RIFI 60, MAESTRA 60/27.

**MATERIAL**

- Polymer Body: Kraiburg TPE
- Metal structure: Galvanised steel Dx54d + Z140
- Bowl shaped leveller: Galvanised steel Dx54d + Z140

Part Number	Colour	Thread Size	Weight Range per mount (Kg)	TPE Properties
F-RAPID/FM-60-VDS2	Green	M6, M8	3 ~ 25	<a href="#">PDF</a>
F-RAPID/FM-60-ADS2	Blue	M6, M8	20 ~ 45	<a href="#">PDF</a>

**Resonance Frequency:** 7-15Hz

**Breaking Point:** >300kg

- [DIMENSIONAL DRAWING](#)

**Installation Instructions**



