

FLOATING FLOOR MOUNT

Series: FTD-RASTREL L




- Super slim, fits in tight places.
- Easy to install, reduces labour time.
- Suited for eliminating noise above 29dB.
- Tested to acoustic standard ISO 10140.
- Optimal load: 5kg to 25kg per mount.
- Suited for raised floors supported by 20-55mm wooden joists.


MATERIAL

- Polymer Body: Kraiburg TPE
- Metal structure: Galvanised steel dx54d + Z140 with EPDM rubber backing.
- Bowl shaped leveller: Galvanised steel Dx54d + Z140.

Part Number	Optimal Load per mount (kg)	Material Colour	Material Properties
TS-60-V-150	35 ~ 200	Green	PDF
TS-60-A-280	150 ~ 280	Blue	PDF
TS-60-R-400	270 ~ 400	Red	PDF

Resonance Frequency: 7-15Hz.

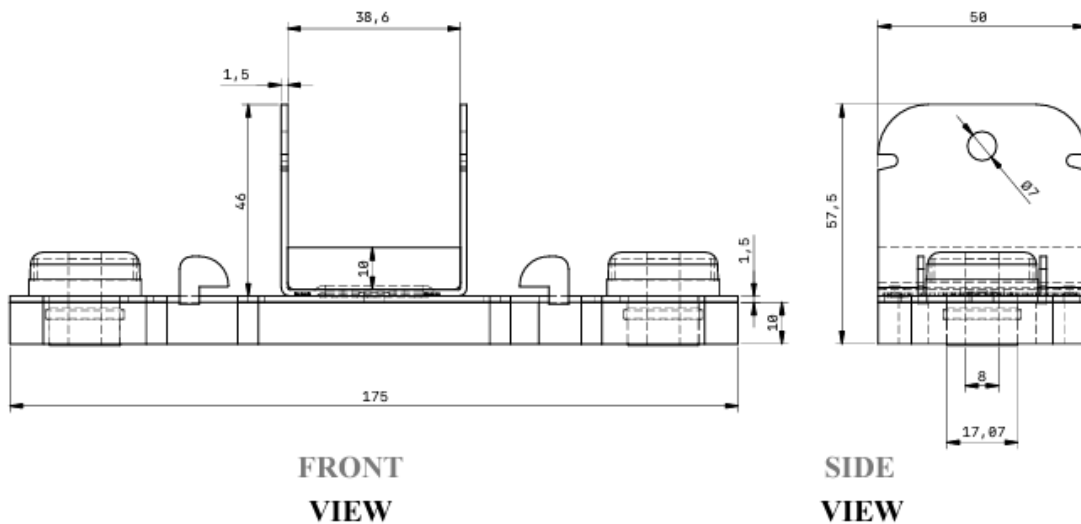

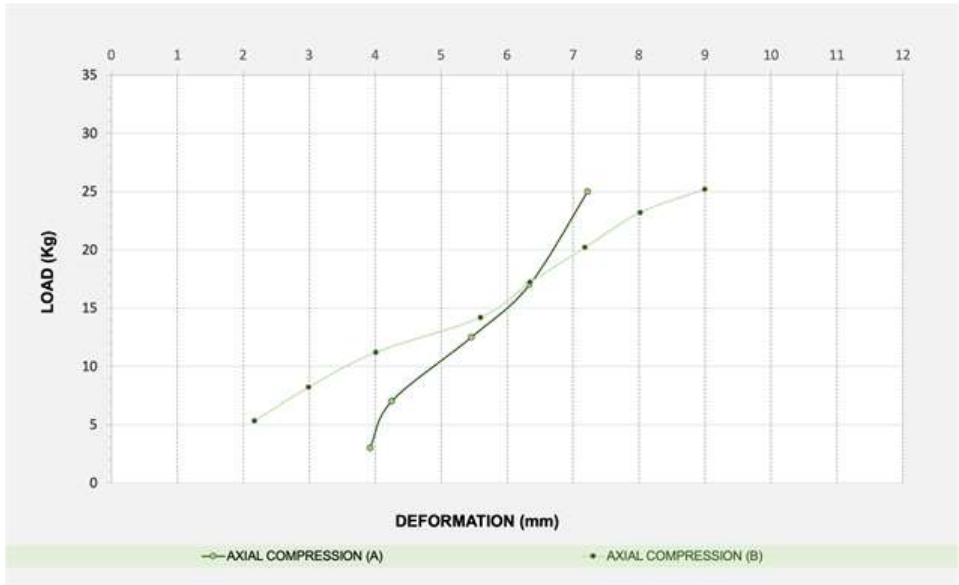

Load (Kg)	Soundproofing Level (%)
3	93.08
8	96.44
15	97.04
20	97.44
25	97.79

INSTALLATION GUIDE

