


# FLAT FERRITE CORES

## Kitagawa series: GSSC

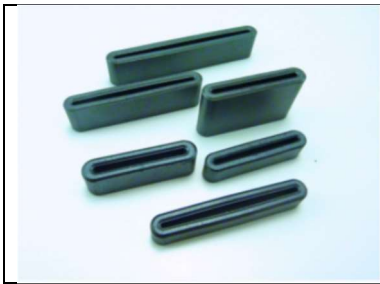

- Suppresses emission noise for ribbon and flat cables.
- Can be fitted before or after assembly.
- Quick and simple solution to apply.

**Material:** Soft ferrite

Part Number	A	B	C	D	E	Impedance $\Omega/100\text{MHz}$ (1 turn)
GSSC-33.5-8	33.5	1.4	6.5	8.0	28.4	$\geq 30$
GSSC-33.5-10	33.5	1.4	6.5	10.0	28.4	$\geq 30$
GSSC-33.5-10-2	33.5	2.2	7.4	10.0	27.0	$\geq 30$
GSSC-33.5-12	33.5	1.4	6.5	12.0	28.4	$\geq 35$
GSSC-33.5-20	33.5	1.3	6.5	20.0	27.8	$\geq 50$
GSSC-40-12	40.0	1.3	6.5	12.0	35.0	$\geq 35$
GSSC-45-8	45.2	1.3	6.5	8.0	40.0	$\geq 30$
GSSC-45-12	45.2	1.3	6.5	12.0	40.0	$\geq 35$
GSSC-50-12	50.0	1.3	6.5	12.0	44.9	$\geq 35$
GSSC-58-12	58.0	1.4	6.5	12.0	52.0	$\geq 35$

Dimensions in mm

