


# HIGH IMPEDANCE SPLIT FERRITE

Kitagawa series: KTFC






- Suited for intermediate frequency range 3-50MHz.
- Wire guiding system prevents wires becoming pinched.
- Cable tie assists with securing both wires and the ferrite.
- Optional mounting fixtures with M4 screw thread.

**Material:** Ferrite Core: Soft ferrite  
Housing: PA66 (Colour: natural/Flammability: UL 94-V-0).

Part Number	A	B	C	D	Applicable cable diameter	Impedance $\Omega$ /100MHz (1 turn)
KTR-25-15-18E*	36.3	36.4	21.4	27.5	Max $\varnothing$ 18.5	$\geq$ 66

Dimensions in mm

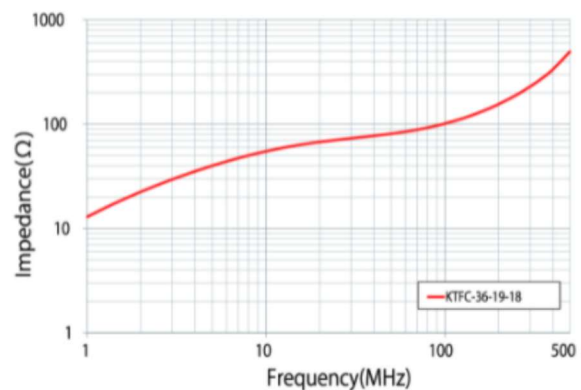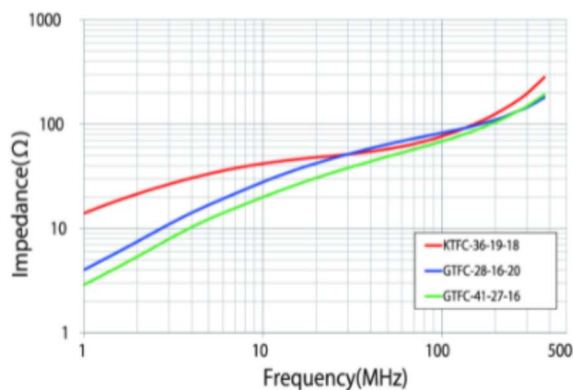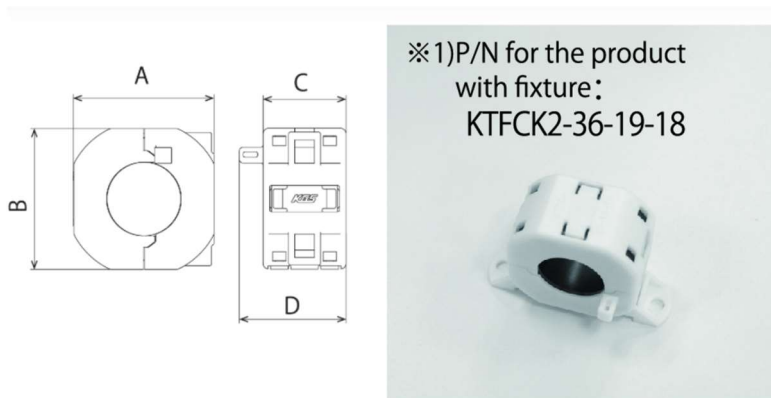

Based on 1 wire turn