

## **ON-BOARD LUG THERMINAL**


## Kitagawa series: OG-R and OG-RM




- Fibreglass reinforcement strengths contact and enhances performance.
- Prevents screw loosening due to vibration.
- OG-RM is flat space saving profile.
- OG-RM30HF offers even more significant space saving
- Temperature Range: -40 to +85°C.

Application Examples Reel Quantities

Part Number	Material
OG-RM30F	Tough pitch copper (Sn plating)
OG-RM30HF	Tough pitch copper (Sn plating)
OG-RM326	Brass
OG-R26 SN	Tough pitch copper (Sn plating)
OG-R30 SN	Tough pitch copper (Sn plating)

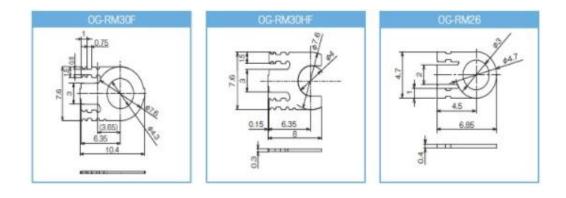



Unit:mm