

CLEAR CONDUCTIVE FILM

series: WINAL




- Eliminates EMC and electro static discharge of LCD screens/panels and other displays.
- Electrically conductive film with superior optical transparency.
- Lightweight and easy to cut.
- Custom profiles available upon request.
- Protected by PET film on both sides.

Material: Base material/PET film


Item	Unit	Standard	WINAL50-005	WINAL100-020	WINAL75-080
Product thickness	μm	-	94	100	75
Surface resistance	Ω/□	JIS K 7194	5	20	80
Total light transmittance	%	JIS K 7136	76	76	76
Surface temperature range for use	°C	-	-30 ~ 80	-30 ~ 80	-30 ~ 80
Flame resistance	-	UL94	-	VTM-2 equivalent	VTM-2 equivalent

Product structure

WINAL50-005

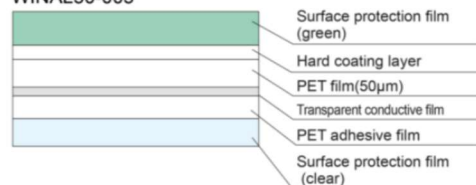

WINAL100-020

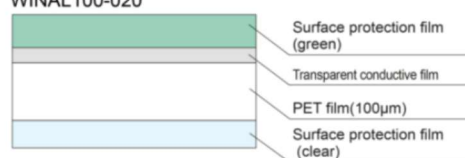

WINAL75-080

