


# DOUBLE LOCKING SPACER

Kitagawa series: WLS

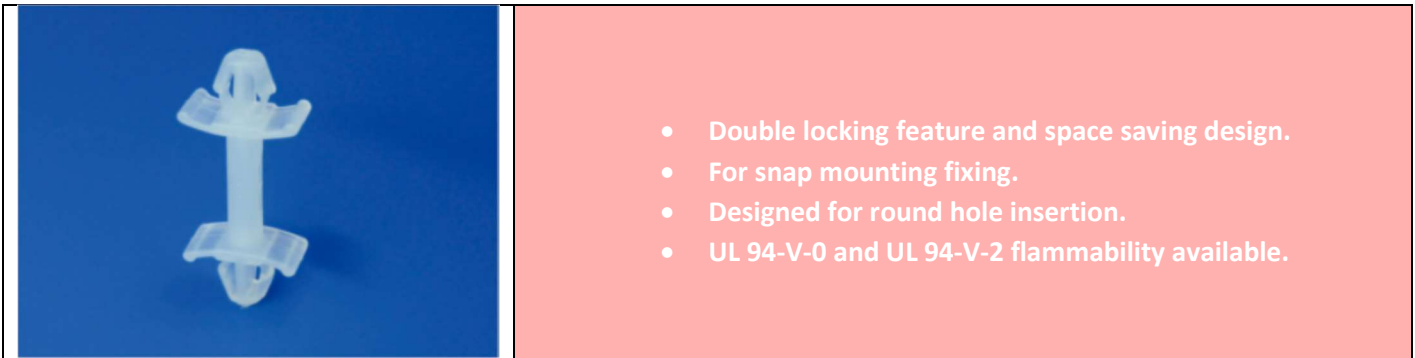

**Material:** Nylon 66 (Grey)

Flammability: UL 94-V-0 or UL 94-V-2

Part Number	A	(B)	Mounting hole size	Panel thickness	Pack Quantity
WLS-03-0	6.2	10.8	Ø3.5 + 00.2	Top/Bottom: 1.6±0.15	500pcs
WLS-04-0	7.2	11.8	Ø3.5 + 00.2	Top/Bottom: 1.6±0.15	500pcs
WLS-06-0	9.2	15.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	500pcs
WLS-08-0	11.2	17.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	1000pcs
WLS-10-0	13.2	19.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	500pcs
WLS-12-0	15.2	21.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	1000pcs
WLS-13-0	16.2	22.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	500pcs
WLS-14-0	17.2	23.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	1000pcs
WLS-16-0	19.2	25.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	500pcs
WLS-16.8-0	20.0	26.0	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	1000pcs
WLS-18-0	21.2	27.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	500pcs
WLS-20-0	23.2	29.2	Ø4 ± 0.1	Top/Bottom: 1.6±0.15	500pcs

Dimensions in mm

To specify V-0 rating please add V0 to the end of the part number.

