


# CONDUCTIVE FABRIC TAPE

series: **CSTK**




- Carbon coating protects from galvanic corrosion.
- No yarn-loosening or fuzz on the surface
- Low resistivity, effective against the electrostatic discharge.



**Material:** Thin and durable carbon-coated type.

| Part Number     | Width (mm) | Thickness (mm) | Adhesive strength | Resistivity |
|-----------------|------------|----------------|-------------------|-------------|
| <b>CSTK-008</b> | 8          | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-015</b> | 15         | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-020</b> | 20         | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-025</b> | 25         | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-030</b> | 30         | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-040</b> | 40         | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-060</b> | 60         | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-250</b> | 250        | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |
| <b>CSTK-300</b> | 300        | 0.1            | 8.53 N/25mm/Width | 0.04Ω/20mm  |

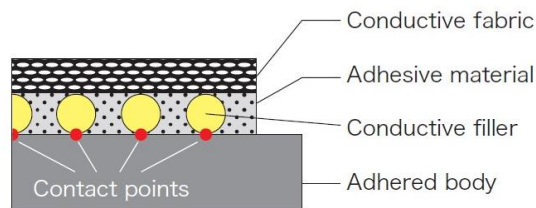

For engineering drawings, 3D files or additional test data please contact our [sales team](#).

**ANNOTATION**

All specifications shown herein are typical values and are not guaranteed. It is recommended to test in the application for suitability.