


## ALS- ANTI VIBRATION MATERIAL PROPERTIES

Item	Unit	Standard	ALS-20A-BK	ALS-37A-BK
Hardness	Duro Type A	JIS 6253	20	37
Tensile Strength	MPa	JIS K6251	6.63	5.54
Elongation	%	JIS K6251	1119	870
Compression Set	%	JIS K6262	1.3	33.2
Flame Retardancy	-	UL94	-	-
Resonance Frequency	Hz	-	204.2	176.3
Maximum vibration transmissibility	-	-	1.7	1.5
Loss Factor	-	-	0.96	1.31

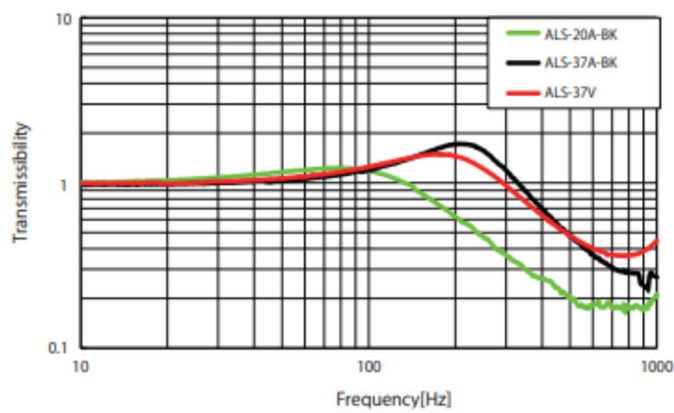

<Testing condition>  
 Sample : □5mm, t=3mm  
 Load : 400g  
 Support point number : Four point mounting  
 Acceleration : 0.4G