

GKPR CAPTIVE TRANSIT RUBBER MOUNT


Series: GKPR



- Compact design with inbuilt bump and rebound control feature to control movement of equipment in transit.
- Dome shaped metal cap protects the elastomer against splashes of oil and fuel contamination.
- Compression design and metal cap effectively eliminate airborne noise when compared to spring mountings.
- Thick base flange metal to give added strength .
- Low height captive mounting capable of taking loads of 40kg to 5000kg.
- ROHS and REACH SVHC compliant.
- Applicable for static and mobile generators, pumps, compressors, centrifugal fans and blowers and railway equipment.

MATERIAL

- Natural Rubber (NR)
- Colour: Black

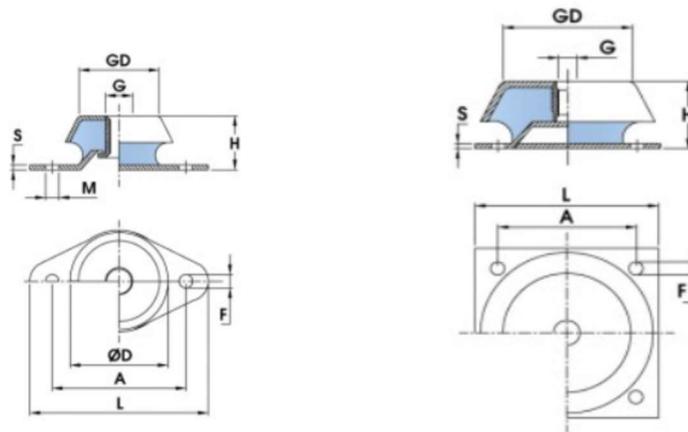

Part Number	L (mm)	H (mm)	A (mm)	F x M (mm)	D (mm)	GD (mm)	S (mm)	G
GKPR12830	128.00	30.00	111.00	9x9	77.00	59.00	2.00	M10
GKPR10631	106.00	31.00	75.00	8.3x16	66.00	50.00	3.00	M12
GKPR10635	106.00	35.00	75.00	8.3x16	60.00	50.00	2.00	M12
GKPR11035	110.00	35.00	73.00	8.3x16	65.00	50.00	3.00	M10/12
GPKR12035S	120.00	35.30	100.00	11x11	63.50	47.00	2.00	M10/12
GKPR14436	144.00	36.00	124.00	10x10	93.00	70.00	2.50	M10
GKPR17238	172.00	38.00	138.00	14x18	106.00	81.00	3.00	M16
GKPR16940S	169.00	40.00	140.00	14x19	105.00	77.00	3.00	M16
GKPR19241	192.00	40.50	158.00	14x14	115.00	90.00	3.00	M16
GKPR12845	138.00	45.00	110.00	10.5x10.5	92.00	73.50	3.00	M12
GKPR21648	216.00	48.00	182.00	14x19	145.00	118.00	4.00	M16
GKPR19050	19.00	50.00	160.00	16.5x16.5	108.00	83.00	5.00	M16
GKPR21652S	216.00	52.00	182.00	14x19	155.00	134.00	4.00	M16

GKPR19066	190.00	66.50	16.00	14x14	181.00	140.00	4.00	M20(square Base Flange)
GKPR18086S	190.00	86.00	146.00	14x14	180.00	141.00	5.00	M20(square Base Flange)
GKPR220105	22.00	150.00	180.00	18x18	220.00	160.00	6.00	M24(square Base Flange)

LOAD Deflection Details	45 ShA		60 ShA		70 ShA		
	Part Number	MAX Kg's	MAX mm	MAX Kg's	MAX mm	Max Kg's	MAX mm
GKPR11035	70	3.5	124	3.5	196	3.5	
GKPR10635	63	3.0	114	3.0	-	-	
GKPR10631	94	3.0	170	3.0	-	-	
GKPR12035S	60	4.0	118	4.0	-	-	
GKPR12830	120	3.1	220	3.0	-	-	
GKPR12845	350	4.0	600	4.0	750	3.0	
GKPR14436	180	3.5	330	3.0	-	-	
GKPR16940S	200	6.0	400	6.0	600	6	
GKPR17238	240	3.5	450	3.5	-	-	
GKPR19050	400	3.0	750	3.0	1400	3.0	
GKPR19241	425	4.0	690	4.0	-	-	
GKPR21648	750	5.5	1100	5.0	-	-	
GKPR21652S	480	10	800	10	1700	10	
GKPPR18086S (Square Base Flange)	1500	9.0	2300	8.0	3200	6.4	
GKPR18086S (Square Base Flange)	850	15	1500	15	-	-	
GKPR220105 (Square Base Flange)	1600	16	3400	12	5012	5.5	

ANNOTATION

All specifications shown herein are typical values and are not guaranteed. It is recommended to test in the application for suitability.