PCB PLUG-IN ELEMENT WITH PEG

Series: SES

- **Material: TPE (Thermoplastic elastomer)**
- **Colour: black**
- **Hardness: Approx. 65 Shore A**
- **Temperature Range: -40 to +100°C.**
- **Fire Resistance: UL 94-V-0.**
- **ROHS and REACH SVHC compliant.**
- **Typical applications include CCTV systems, surgical equipment, robots, automotive electronics and computer hardware.**

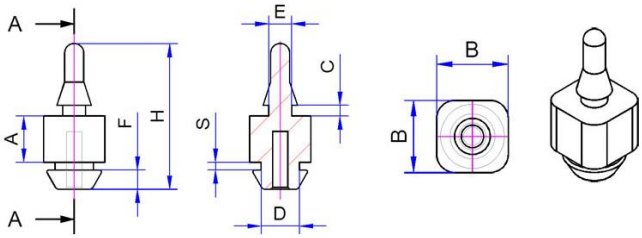

Part Number	A	B	C	D	E	F	H	S
SES-16-50-30-10	5.0	8.0	1.4	5.0	3.0	2.5	17.9	1.0
SES-16-50-30-20	5.0	8.0	1.4	5.0	3.0	2.5	18.9	2.0
SES-16-50-40-10	5.0	8.0	1.4	5.0	4.0	2.5	18.9	1.0
SES-16-50-40-20	5.0	8.0	1.4	5.0	4.0	2.5	19.9	2.0
SES-16-60-30-10	6.0	8.0	1.4	5.0	3.0	2.5	18.9	1.0
SES-16-60-30-20	6.0	8.0	1.4	5.0	3.0	2.5	19.9	2.0
SES-16-60-40-10	6.0	8.0	1.4	5.0	4.0	2.5	19.9	1.0
SES-16-60-40-20	6.0	8.0	1.4	5.0	4.0	2.5	20.9	2.0
SES-16-80-30-10	8.0	8.0	1.4	5.0	3.0	2.5	20.9	1.0
SES-16-80-30-20	8.0	8.0	1.4	5.0	3.0	2.5	21.9	2.0
SES-16-80-40-10	8.0	8.0	1.4	5.0	4.0	2.5	21.9	1.0
SES-16-80-40-20	8.0	8.0	1.4	5.0	4.0	2.5	22.9	2.0
SES-16-100-30-10	10.0	8.0	1.4	5.0	3.0	2.5	22.9	1.0
SES-16-100-30-20	10.0	8.0	1.4	5.0	3.0	2.5	23.9	2.0
SES-16-100-40-10	10.0	8.0	1.4	5.0	4.0	2.5	23.9	1.0
SES-16-100-40-20	10.0	8.0	1.4	5.0	4.0	2.5	23.9	2.0

SES	16	50	30 or 40	10 or 20
Part number series	Thickness of PCB (1.6mm)	Dimension A (6mm)	Dimension E: 30 = 3-3.5mm drilled holes 40 = 4-4.5mm drilled holes	Panel thickness 10 = 0.75 ~ 1.25mm 20 = 1.50 ~ 2.50mm

- MOUNTING GUIDANCE