



# MOUNTING BUMPER

Series: UME

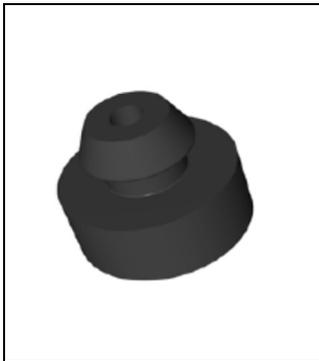


- Material: TPE (Thermoplastic elastomer)
- Colour: black
- Hardness: approx. 65 Shore A
- Temperature Rating: -40°C to +100°C.
- Flammability Rating: UL 94-V-0
- ROHS and REACH SVHC compliant.
- Other sizes available upon request.


### Application examples

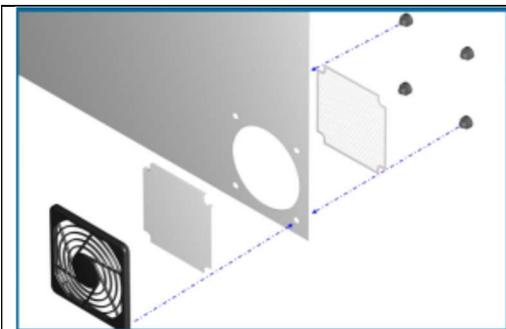


Part of fan sleeve assembly.

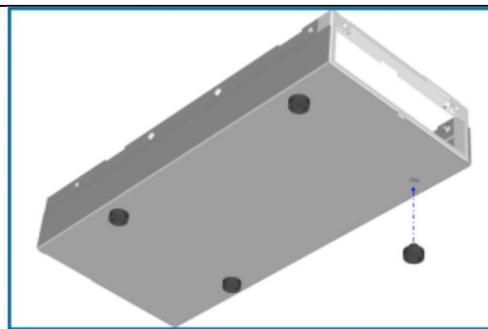

Pegs for housing boxes.

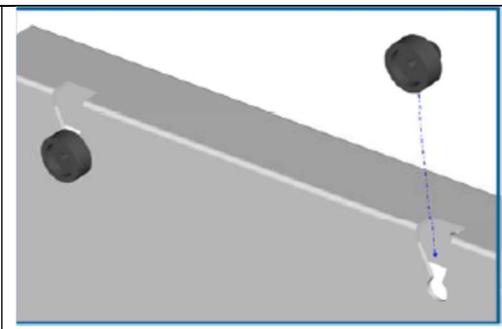



Stop buffer for an enclosure.

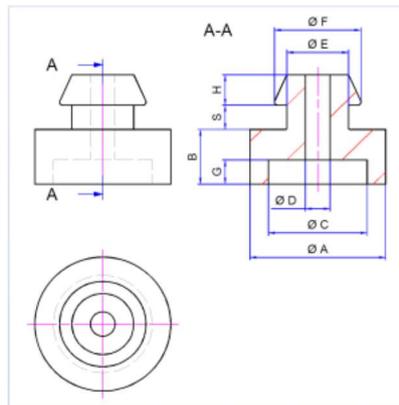

UME	110	45	10 or 20
Series	Diameter (11mm)	Height (4.5mm)	Panel thickness: 10 = 0.75 ~ 1.25 20 = 1.50 ~ 2.50

Part Number	A	B	C	D	E	F	G	H	S	Panel thickness
UME-110-45-10	11.0	4.5	8.0	2.0	5.0	7.0	2.0	2.5	1.0	0.75 ~ 1.25
UME-110-45-0	11.0	4.5	8.0	2.0	5.0	7.0	2.0	2.5	2.0	1.50 ~ 2.50

### Mounting options

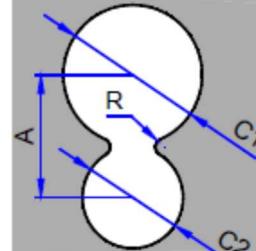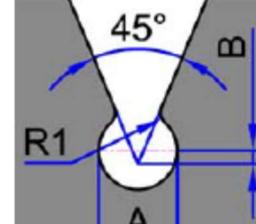	<p>Mounting bumpers can be fixed easily by plugging the peg into a slightly chamfered hole (5.2mm diameter) in the mounting panel.</p>								
	<p>Alternatively, you can plug the peg into an 8-shape perforation, by first plugging it into the large hole of the mounting panel and then pushing it into the smaller hole.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>A</th> <th>C1</th> <th>C2</th> <th>R</th> </tr> </thead> <tbody> <tr> <td>6.5</td> <td>7.5</td> <td>5.2</td> <td>1.0</td> </tr> </tbody> </table>	A	C1	C2	R	6.5	7.5	5.2	1.0
A	C1	C2	R						
6.5	7.5	5.2	1.0						
	<p>The plug-in peg of the mounting bumper can also be pushed into a conical cut-out, until it has been snapped in (see picture).</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>5.2</td> <td>0.5</td> </tr> </tbody> </table>	A	B	5.2	0.5				
A	B								
5.2	0.5								

Dimensions in mm

#### ANNOTATION

All specifications shown herein are typical values and are not guaranteed. It is recommended to test in the application for suitability.